






500P

AGG. 09/20

3~ 50 Hz. 400V	
PERKINS	
EU STAGE 0	
69 dB(A) @ 7 mt	
400 lt	

PRIME POWER		STAND-BY POWER	
kVA	kW	kVA	kW
500	400	550	440

ENVIRONMENTAL CONDITIONS	
Temperature	40° C
Height	1000 mslm
Humidity	60%

OPEN VERSION B750

SOUNDPROOF VERSION C500


The image is only for demonstration purposes

PESO WEIGHT POIDS	DIMENSIONI - DIMENSIONS		
	L [mm]	W [mm]	H [mm]
3930	3450	1550	2100

PESO WEIGHT POIDS	DIMENSIONI - DIMENSIONS		
	L [mm]	W [mm]	H [mm]
5140	4850	1850	2550


TECHNICAL DETAILS

ELECTRICAL DATA	Electrical system type	3F+N	~
	Power factor	0,8	φ
	Voltage	400	V
	Frequency	50	Hz
	PRP Ampere rating	721	A
ENGINE	Engine	PERKINS 2506A-E15TAG2	
	Engine emissions standard (REG. UE 2016/1628)	EU STAGE 0	
	RPM governor	Elettronico – <i>Electronic</i> – Électronique	
	Performance class (ISO8528-5)	G3	
	Rpm	1500	rpm
	Nr. of cylinders	6	
	Bore x stroke	137 x 171	mm
	Displacement	15200	cc
	Induction system	Sovralimentata – <i>Turbocharged</i> – Turbo	
	Cooling system	Acqua – <i>Water</i> – Eau	
	Engine net prime power	583 (435)	Hp (kW)
Exhaust gas aftertreatment	/		
CONSUMPTION	Fuel type	Diesel	
	Consumption @ 50-75-100% carico – load - charge	53 – 76 – 100	lt/h
	Standard tank capacity	400	lt
	Autonomy @ 75% carico – load - charge	5,3	h
ALTERNATOR	Alternator	STAMFORD – MECC ALTE – MARELLI MOTORI	
	Type	<i>Self excited, brushless</i>	
	Number of poles	4	
	Insulation class	H	
	Temperature rise class	H	
	Voltage regulation	AVR	
	Voltage precision	± 1	%
GENERAL	Sound level (soundproof version)	69	dB(A) 7mt
	Exhaust pipe diameter	200	mm
	Electrical system voltage	24	V

ELECTRIC PANEL

MANUAL

AUTOMATIC MAINS FAILURE

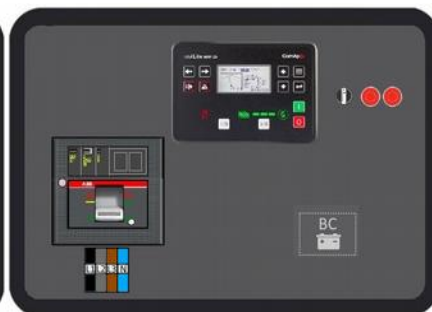

<i>Electronic control unit with multimeter</i>	COMAP AMF25	COMAP AMF25
<i>Electrical panel enclosure protection degree</i>	IP44	
<i>ON-OFF electric panel switch</i>	<i>Key type</i>	<i>Without key</i>
<i>Emergency pushbutton</i>	STANDARD	
<i>Battery charge maintainer</i>	<i>/</i>	24V 5A
<i>Power supply</i>	<i>Full power terminal</i>	<i>Full power terminal</i>
<i>Circuit breaker</i>	<i>Magnetothermal type 4P ABB Tmax-T 800A</i>	<i>Magnetothermal type 4P ABB Tmax-T 800A</i>
<i>Main protection alarms</i>	<i>Min-max V and Hz. LOP. HWT. Battery charger alternator failure. Low fuel level</i>	

STANDARD ELECTRONIC CONTROL UNIT

COMAP
AMF25



Functions: automatic or manual start, remote start, periodic test

Multimeter V (L1, L2, L3, N), A (L1, L2, L3), Hz, kVA, battery V, hour counter

Backlit LCD display. USB port

Communication accessories available: Ethernet, GSM-GPRS, 4G, GPS

MODBUS and SNMP communication protocols support

Advanced PLC configurability


OPTIONAL ELECTRONIC CONTROL UNIT



DEEP SEA DSE7320 MKII

SOUNDPROOF AND WEATHERPROOF CANOPY

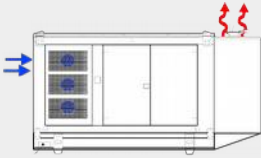

<i>Self-supporting frame material</i>	<i>Carbon steel sheet, electro-welded, minimum thickness 4 mm</i>
<i>Soundproof canopy material</i>	<i>Carbon steel sheet, electro-welded, thickness between 2 and 9 mm</i>
<i>Painting</i>	<i>Epoxy powder RAL5015 textured, outdoor-proof</i>
<i>In-built fuel tank</i>	400 lt + Drip tray
<i>Soundproofing coating material</i>	<i>Polyester fiber. Fire resistance EN13501-1 class B</i>
<i>Muffler</i>	<i>In-built the canopy. Residential type with sound reduction 35 dB(A)</i>
<i>Access openings</i>	<i>n.4 doors with padlockable key lock</i>
<i>Electric panel</i>	<i>Lateral side position. Dedicated door with key lock</i>
<i>Fresh air intake and hot air expulsion</i>	
<i>Lifting system</i>	<i>n.4 lifting hooks</i>
<i>Support feet</i>	<i>n.4 support feet with holes for machine ground fastening</i>

MAIN OPTIONS



800A automatic transfer switch (ATS)



600 Lt bigger fuel tank with drip tray



2000W engine preheating system with integrated circulating pump



Kit travaso carburante automatico con sistema di by-pass manuale
Automatic fuel transfer kit with manual by-pass system



Residual current protection relay adjustable in sensitivity and intervention time

OTHER OPTIONS

Power distribution socket set

Synchronizing electric panel

Battery switch

Remote control systems

ETHERNET, 2G - 3G - 4G, GPS

Further alternator brand

Quick couplings for connecting an external tank with three way valve

Outdoor, underground and transportable tanks

Slow or fast towing trailer

Front hot air expulsion canopy

Further colors

Greenpower AB

Helsingborgsvägen Varalöv,

262 96 Ängelholm, Sweden

Phone: +46 43122240

Email: info@greenpower.se

Web: www.greenpower.se